


NEOPERL®

flow, stop and go®

FLEXCORE®

Flexi pripojovacie hadičky

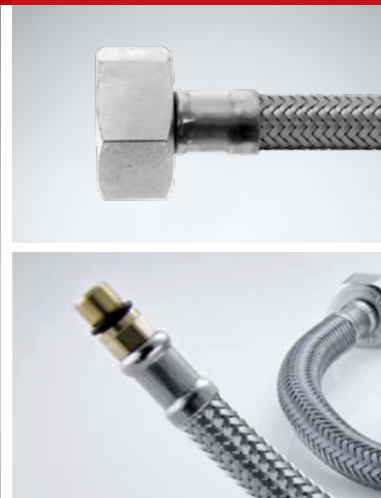

FLEXCORE® hadica je ideálnym riešením pre pripájanie vodovodných rozvodov k akýmkoľvek batériám. Špecifický materiál a tvar prierezu vnútra hadice umožňuje používať hadicu Flexcore tam, kde je priestor na inštaláciu veľmi obmedzený a kde je potrebný malý ohýbací rádius až do 25mm. Jej konštrukcia zabraňuje skrúteniu pri inštalácii. Použitý materiál na výrobu hadíc Flexcore je schválený hlavnými certifikačnými orgánmi na celom svete pre pitnú vodu. Hadica Flexcore spĺňa všetky požiadavky európskych noriem EN13618 a EU certifikačných skúšobní DVGW, KIWA, SVGW, WRAS.

FLEXCORE® is an anti-kinking hose and is the ideal solution for the connection of the water network to any kind of taps, where the space for the installation is very reduced and a narrow bending radius is needed. Actually the particular conformation of the inner tube allows to use the Flexcore hose also with a radius up to 25 mm. Moreover the material used for manufacturing the Flexcore hose is drinking water approved from the main certification bodies worldwide. The Flexcore hose meets all the requirements established by European Standard En13618.

TECHNICKÁ ŠPECIFIKÁCIA / TECHNICAL SPECIFICATIONS



PE-RT

Vnútro

Inliner

DN8



inox

Vonkajšie opletenie
Inox AISI 304

Braiding St. steel
AISI 304



Ø mm

Vonjšší
rozmer

Outer
diameter

12



R - mm

Min. rádius
ohybu

Bending
radius

25



bar

Pracovný
tlak

Working
pressure

10



°C

Pracovná
teplota

Temp. of
passing fluid

-5° + 70°



lt/min-3bar

Prietok

Water supply

32

PRIPOJOVACIE TVAROVKY / CONNECTING FITTINGS



F



M



MOK

3/8 - 1/2

3/8 - 1/2

10x1